

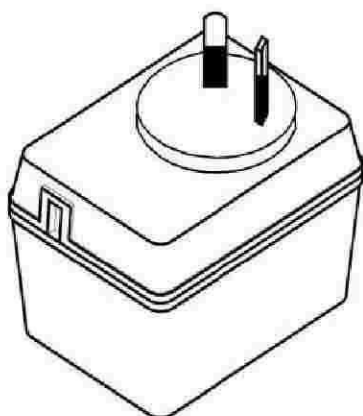
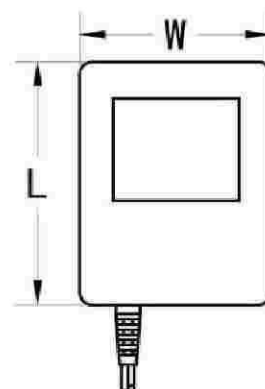
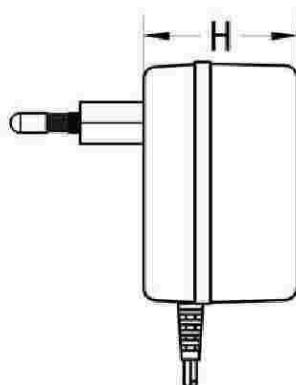
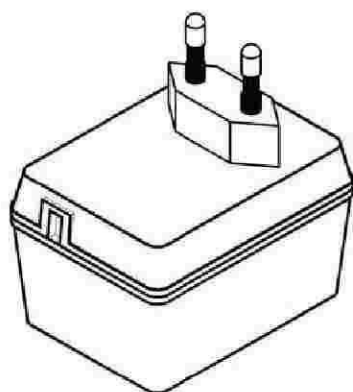
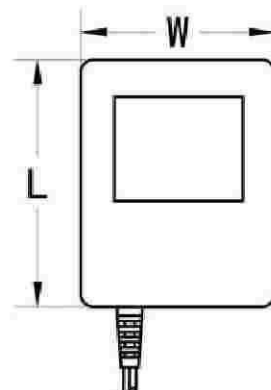





ENCLOSURE TYPE	RANGE OF OUTPUT POWER (VA)	RANGE OF OUTPUT VOLTAGE (V)	External Dimensions (mm)		
			L	W	H
351	AC: 1.2 ~ 2.8 DC: 0.9 ~ 2.0	1.5 ~ 24.0	71.0	43.5	37.0
352	AC: 1.2 ~ 2.8 DC: 0.9 ~ 2.0	1.5 ~ 24.0	57.5	45.0	37.0
411/414	AC: 2.8 ~ 8.0 DC: 2.0 ~ 5.5	1.5 ~ 27.0	62.0	50.0	40.5
413	AC: 3.0 ~ 10.0 DC: 2.0 ~ 5.5	1.5 ~ 27.0	67.5	52.0	40.5
412	AC: 3.0 ~ 10.0 DC: 2.5 ~ 7.0	3.0 ~ 30.0	82.0	52.0	41.5
481	AC: 10.0 ~ 20.0 DC: 7.0 ~ 14.0	3.0 ~ 30.0	83.0	56.5	51.5
483	AC: 10.0 ~ 20.0 DC: 7.0 ~ 14.0	3.0 ~ 30.0	81.3	57.5	48.0
571	AC: 18.0 ~ 36.0 DC: 12.0 ~ 25.0	3.0 ~ 30.0	98.5	66.5	56.0

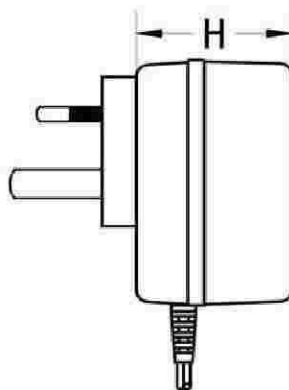




ENCLOSURE TYPE	RANGE OF OUTPUT POWER (VA)	RANGE OF OUTPUT VOLTAGE (V)	External Dimensions (mm)		
			L	W	H
352	AC: 1.2 ~ 2.8 DC: 0.9 ~ 2.4	1.5 ~ 24.0	57.5	45.0	37.0
411/414	AC: 2.8 ~ 8.0 DC: 2.0 ~ 5.5	1.5 ~ 27.0	63.0	50.5	40.5
412	AC: 3.0 ~ 10.0 DC: 2.5 ~ 7.0	3.0 ~ 30.0	82.0	52.0	41.5
482	AC: 10.0 ~ 20.0 DC: 7.0 ~ 14.0	3.0 ~ 30.0	80.5	55.5	48.0
571	AC: 18.0 ~ 36.0 DC: 10.0 ~ 25.0	3.0 ~ 36.0	97.5	66.0	56.0

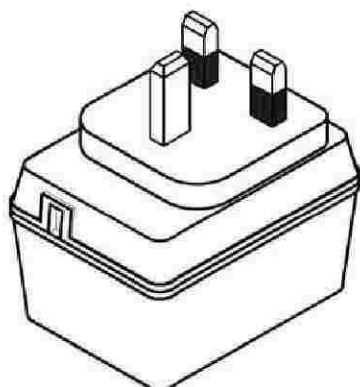

ENCLOSURE TYPE	RANGE OF OUTPUT POWER (VA)	RANGE OF OUTPUT VOLTAGE (V)	External Dimensions (mm)		
			L	W	H
353	AC: 1.2 ~ 2.8 DC: 0.6 ~ 2.0	1.5 ~ 24.0	55.5	50.0	48.3
414	AC: 2.8 ~ 8.0 DC: 2.0 ~ 5.5	1.5 ~ 27.0	62.0	50.0	40.0
412	AC: 3.0 ~ 10.0 DC: 2.5 ~ 7.0	3.0 ~ 36.0	82.0	52.0	41.5
482	AC: 10.0 ~ 20.0 DC: 7.0 ~ 14.0	3.0 ~ 30.0	80.5	55.5	48.0
571	AC: 18.0 ~ 36.0 DC: 12.0 ~ 25.0	3.0 ~ 36.0	98.5	66.5	56.0

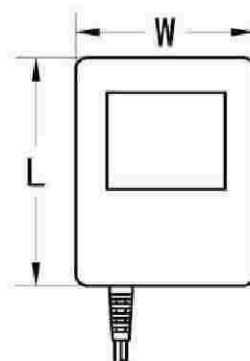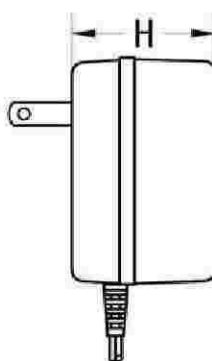

ENCLOSURE TYPE	RANGE OF OUTPUT POWER (VA)	RANGE OF OUTPUT VOLTAGE (V)	External Dimensions (mm)		
			L	W	H
28X	AC: 0.4 ~ 1.8 DC: 0.5 ~ 1.5	1.5 ~ 24.0	58.5	36.4	36.2
351	AC: 0.06 ~ 2.8 DC: 0.06 ~ 2.4	1.2 ~ 24.0	71.0	43.5	37.0
352	AC: 0.06 ~ 2.8 DC: 0.06 ~ 2.4	1.2 ~ 24.0	57.5	45.0	37.0
354	AC: 0.6 ~ 6.0 DC: 0.9 ~ 3.4	1.5 ~ 30.0	56.5	42.0	38.5
411/414	AC: 2.0 ~ 8.0 DC: 2.0 ~ 6.0	1.2 ~ 27.0	63.0	50.5	40.5
413	AC: 3.0 ~ 10.0 DC: 2.0 ~ 6.0	1.2 ~ 27.0	67.5	52.0	40.5
412	AC: 3.0 ~ 10.0 DC: 2.5 ~ 7.0	3.0 ~ 30.0	82.0	52.0	41.5
481	AC: 10.0 ~ 20.0 DC: 3.0 ~ 14.0	3.0 ~ 30.0	83.0	58.0	51.0
483	AC: 10.0 ~ 20.0 DC: 7.0 ~ 14.0	3.0 ~ 30.0	81.3	57.5	48.0
571	AC: 9.0 ~ 50.0 DC: 6.0 ~ 25.0	3.0 ~ 30.0	97.5	66.0	56.0

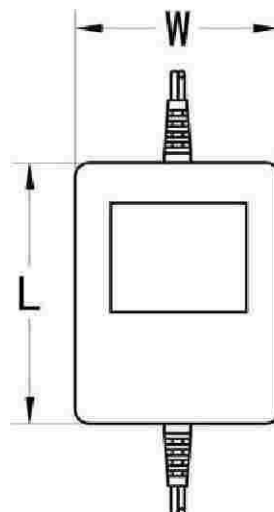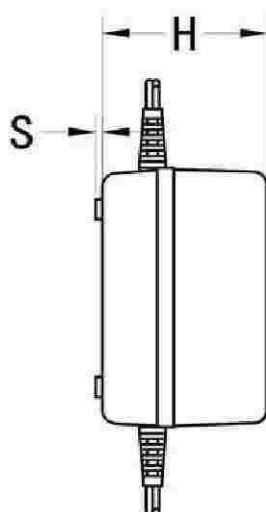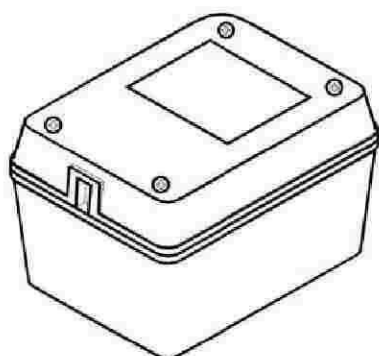

ENCLOSURE TYPE	RANGE OF OUTPUT POWER (VA)	RANGE OF OUTPUT VOLTAGE (V)	External Dimensions (mm)			
			L	W	H	S
48X	AC: 10.0 ~ 20.0	3.0 ~ 30.0	83.0	57.5	50.0	
571	AC: 18.0 ~ 36.0 DC: 12.0 ~ 25.0	3.0 ~ 30.0	98.5	66.5	56.0	1.0
57X	AC: 18.0 ~ 30.0 /	3.0 ~ 30.0	84.0	63.5	57.5	/
661	AC: 50.0 ~ 80.0 /	6.0 ~ 36.0	100.5	73.5	64.0	/
662	AC: 60.0 ~ 90.0 DC: 30.0 ~ 50.0	6.0 ~ 36.0	106.5	76.5	65.0	1.0
663	AC: 90.0 ~ 130.0 DC: 50.0 ~ 80.0	6.0 ~ 36.0	138.0	92.0	67.0	1.0
86X	AC: 90.0 ~ 150.0 /	6.0 ~ 36.0	126.0	80.5	71.5	/