


IP44 ADAPTER



IP44 Adapter			IP44 Adapter		
IP44-35	Name	IP44-35	IP44-57	Name	IP44-57
	Model	XY-*****AGO		Model	XY-*****AGO
	Size	50×44×61mm		Size	70×65×80mm
	STANDARD	CE/GS(EN 61558-2-6) IP44		STANDARD	CE/GS(EN 61558-2-6) IP44
	***=Output Voltage	3.0-24.0VAC		***=Output Voltage	3.0-24.0VAC
	****=Output Current	100-1200mA		****=Output Current	100-2500mA
	Watts	5 VA MAX		Watts	25VA MAX
IP44-41	Name	IP44-41	DGO-35	Name	DGO-35
	Model	XY-*****AGO		Model	XY-*****DGO
	Size	52×48×66mm		Size	68×45×65mm
	STANDARD	CE/GS(EN 61558-2-6) IP44		STANDARD	CE/GS(EN 61558-2-6) IP44
	***=Output Voltage	3.0-24.0VAC		***=Output Voltage	3.0-30.0VDC
	****=Output Current	100-2000mA		****=Output Current	100-1000mA
	Watts	10 VA MAX		Watts	3 VA MAX
IP44-48	Name	IP44-48	DGO-41	Name	DGO-41
	Model	XY-*****AGO		Model	XY-*****DGO
	Size	56×56×67mm		Size	76×45×68mm
	STANDARD	CE/GS(EN 61558-2-6) IP44		STANDARD	CE/GS(EN 61558-2-6) IP44
	***=Output Voltage	3.0-24.0VAC		***=Output Voltage	3.0-30.0VDC
	****=Output Current	100-2000mA		****=Output Current	100-1200mA
	Watts	12 VA MAX		Watts	7 VA MAX
IP44-48L	Name	IP44-48L	DGO-48	Name	DGO-48
	Model	XY-*****AGO		Model	XY-*****AGO
	Size	68×57×67mm		Size	68×57×67mm
	STANDARD	CE/GS(EN 61558-2-6) IP44		STANDARD	CE/GS(EN 61558-2-6) IP44
	***=Output Voltage	3.0-24.0VAC		***=Output Voltage	3.0-24.0VAC
	****=Output Current	100-2500mA		****=Output Current	100-2000mA
	Watts	20.4 VA MAX		Watts	12 VA MAX

IP68 ADAPTER

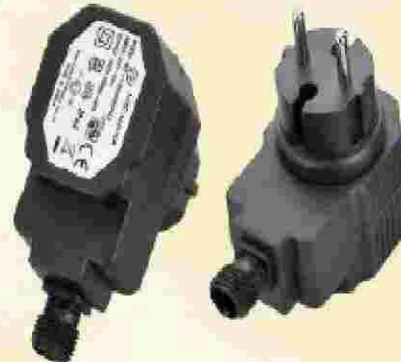

IP68 Adapter			IP68 Adapter		
IP68-35	Name	IP68-35	IP68-57	Name	IP68-57
	Model	XY-*****AUO/AGO/ABO/ASO		Model	XY-*****AUO/AGO/ABO/ASO
	Size	63×38×50mm		Size	90×64×66mm
	STANDARD	UL/CUL GSBS CE SAA/C-Tick CB PSE IP68		STANDARD	UL/CUL GSBS CE SAA/C-Tick CB PSE IP68
	***=Output Voltage	3.0~24.0VAC		***=Output Voltage	3.0~24.0VAC
	****=Output Current	100~1200mA		****=Output Current	100~4000mA
IP68-41	Watts	5 VA MAX	IP68-66	Watts	40 VA MAX
	Name	IP68-41		Name	IP68-66
	Model	XY-*****AUO/AGO/ABO/ASO		Model	XY-*****AUO/AGO/ABO/ASO
	Size	70×43×69mm		Size	93×64×70mm
	STANDARD	UL/CUL GSBS CE SAA/C-Tick CB PSE IP68		STANDARD	UL/CUL GSBS CE SAA/C-Tick CB PSE IP68
	***=Output Voltage	3.0~24.0VAC		***=Output Voltage	3.0~24.0VAC
IP68-48	****=Output Current	100~2000mA		****=Output Current	100~5000mA
	Watts	12 VA MAX		Watts	65 VA MAX
	Name	IP68-48	IP68-86	Name	IP68-86
	Model	XY-*****AUO/AGO/ABO/ASO		Model	XY-*****AUO/AGO/ABO/ASO
	Size	80×49×64mm		Size	125×79×70mm
	STANDARD	UL/CUL GSBS CE SAA/C-Tick CB PSE IP68		STANDARD	UL/CUL GSBS CE SAA/C-Tick CB PSE IP68
	***=Output Voltage	3.0~24.0VAC		***=Output Voltage	3.0~24.0VAC
	****=Output Current	100~2500mA		****=Output Current	100~10000mA
	Watts	25 VA MAX		Watts	150 VA MAX

LED DRIVER / SWITCHING POWER SUPPLY



Led Driver / Switching Power Supply IP68			Led Driver / Switching Power Supply IP68		
IP68-35W	Size	L×W×H=157×47×35mm	LED-15W	Size	L×W×H=116×31×21mm
	Name	IP68-35W		Name	LED-15W
	Model	XY-xxxxyyy		Model	XY-xxxxyyy
		(xxx=030-480, 3.0-48V yyy=0100-4000 100-4000mA)			(xxx=030-430, 3.0-43V yyy=0100-1000 100-1000mA)
	STANDARD	UL/CUL GS BS CE SAA/C-Tick CB IP68		STANDARD	UL/CUL GS BS CE SAA/C-Tick CB IP68
	Input	100-240VAC 50/60Hz		Input	100-240VAC 50/60Hz
	Output Voltage	3.0-48.0VDC		Output Voltage	3.0-43.0VDC
	Output Current	100-4000mA		Output Current	100-1000mA
	Watts	35VA MAX		Watts	8 VA MAX
IP68-60W	Size	L×W×H=175×49×41mm	LED-50W	Size	L×W×H=205×35×23mm
	Name	IP68-60W		Name	LED-50W
	Model	XY-xxxxyyy		Model	XY-xxxxyyy
		(xxx=030-480, 3.0-48V yyy=0100-5000 100-5000mA)			(xxx=030-480, 3.0-48V yyy=0100-5000 100-5000mA)
	STANDARD	UL/CUL GS BS CE SAA/C-Tick CB IP68		STANDARD	UL/CUL GS BS CE SAA/C-Tick CB IP68
	Input	100-240VAC 50/60Hz		Input	100-240VAC 50/60Hz
	Output Voltage	3.0-48.0VDC		Output Voltage	3.0-48.0VDC
	Output Current	100-5000mA		Output Current	100-5000mA
	Watts	60 VA MAX		Watts	50 VA MAX
LED-8W	Size	L×W×H=90×31×21mm	LED-100W	Size	L×W×H=250×73×45mm
	Name	Name: LED-8W		Name	LED-100W
	Model	Model: XY-xxxxyyy		Model	XY-xxxxyyy
		(xxx=030-300, 3.0-36V yyy=0100-1000 100-1000mA)			(xxx=030-480, 3.0-48V yyy=1000-10000 1000-10000mA)
	STANDARD	UL/CUL GS BS CE SAA/C-Tick CB IP68		STANDARD	UL/CUL GS BS CE SAA/C-Tick CB IP68
	Input	100-240VAC 50/60Hz		Input	100-240VAC 50/60Hz
	Output Voltage	3.0-30.0VDC		Output Voltage	3.0-48.0VDC
	Output Current	100-1000mA		Output Current	1000-10000mA
	Watts	8 VA MAX		Watts	100 VA MAX

POWER SUPPLY IP44



Ringproof Power Supply			Power Supply IP44		
USA-6W-S	Name	USA-6W-S	EU-6W-S	Name	EU-6W-S
	Size	76×42×36mm		Size	76×46×57mm
	Model	XY-xxxyyyy-Z		Model	XY-xxxyyyy-Z
		xxx=030-300, 3.0-30V			xxx=030-300, 3.0-30V
		yyy=0100-1200 100-1200mA			yyy=0100-1200 100-1200mA
	Input	100-240VAC 50/60Hz		Input	100-240VAC 50/60Hz
	Output Voltage	3.0-30.0Vdc		Output Voltage	3.0-30.0Vdc
	Output Current	100-1200mA		Output Current	100-1200mA
USA-12W-S	STANDARD	UL/CUL FCC CEC V	EU-12W-S	STANDARD	GS CE EMC EUP VIP44
	Watts	6.3 VA MAX		Watts	6.3 VA MAX
	Name	USA-6W-S		Name	EU-6W-S
	Size	76×42×36mm		Size	76×46×57mm
	Model	XY-xxxyyyy-Z		Model	XY-xxxyyyy-Z
		xxx=030-300, 3.0-30V			xxx=030-300, 3.0-30V
		yyy=0100-2000 100-2000mA			yyy=0100-2000 100-2000mA
	Input	100-240VAC 50/60Hz		Input	100-240VAC 50/60Hz
USA-18W-S	Output Voltage	3.0-30.0Vdc	EU-18W-S	Output Voltage	3.0-30.0Vdc
	Output Current	100-2000mA		Output Current	100-2000mA
	STANDARD	UL/CUL FCC CEC V		STANDARD	GS CE EMC EUP VIP44
	Watts	12 VA MAX		Watts	12 VA MAX
	Name	USA-6W-S		Name	EU-6W-S
	Size	80×45×38mm		Size	80×48×60mm
	Model	XY-xxxyyyy-Z		Model	XY-xxxyyyy-Z
		xxx=030-300, 3.0-30V			xxx=030-300, 3.0-30V
		yyy=0100-1200 100-3000mA			yyy=0100-1200 100-3000mA
	Input	100-240VAC 50/60Hz		Input	100-240VAC 50/60Hz
	Output Voltage	3.0-30.0Vdc		Output Voltage	3.0-30.0Vdc
	Output Current	100-3000mA		Output Current	100-3000mA
	STANDARD	UL/CUL FCC CEC V		STANDARD	GS CE EMC EUP VIP44
	Watts	18 VA MAX		Watts	18 VA MAX