


## Power Transformers

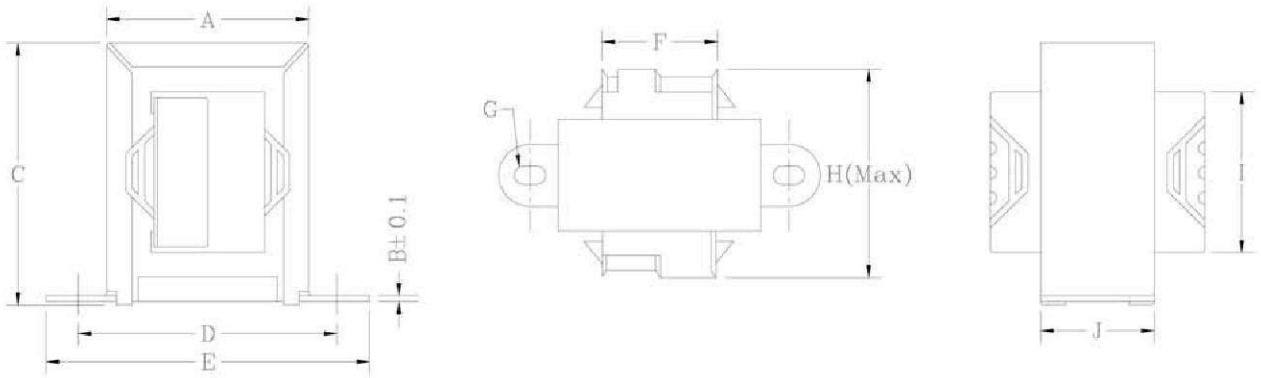

SIZE	CORE STACK (mm)	RANGE OF OUTPUT POWER (VA)	External Dimensions (mm)									
			A	B	C	D	E	F	G	H	I	J
EI-28	12.0	1.0 ~ 1.4	27.0	0.5	30.0	33.5	43.0	17.0	2.9 x 4.6	32.0	20.0	14.5
EI-35	10.0	1.4 ~ 1.8	31.5	0.6	37.5	40.5	51.5	20.0	3.5 x 6.5	32.0	25.0	12.0
	11.0	1.5 ~ 2.0	31.5	0.6	37.5	39.5	50.0	20.0	3.4 x 7.0	33.0	25.0	13.0
	13.5	1.8 ~ 2.6	31.5	0.6	37.5	41.0	52.0	20.0	3.5 x 6.5	35.0	25.0	15.5
	15.5	2.4 ~ 3.5	31.5	0.6	37.5	41.0	53.0	20.0	3.5 x 7.0	37.0	25.0	17.5
EI-41	16.5	4.0 ~ 5.8	35.0	0.6	44.0	46.0	57.5	21.0	3.5 x 7.0	38.0	29.0	18.5
	20.0	5.5 ~ 8.0	35.0	0.6	43.5	43.5	56.0	21.0	3.5 x 6.8	43.0	29.0	22.0
	20.5	6.0 ~ 8.5	35.0	0.6	44.0	43.5	55.5	21.0	3.5 x 6.5	43.0	29.0	23.0
	26.5	7.5 ~ 11.0	35.0	0.6	43.5	46.5	58.0	21.0	3.5 x 7.0	49.0	29.0	28.5
EI-48	18.5	8.0 ~ 11.0	42.0	0.7	51.0	52.5	65.0	24.0	4.0 x 7.0	41.0	32.0	21.0
	21.5	9.0 ~ 12.5	42.0	0.7	51.5	55.0	68.0	24.0	3.5 x 7.0	46.0	32.0	24.0
	23.5	11.0 ~ 15.0	42.0	0.7	51.5	56.0	68.0	24.0	4.1 x 7.7	48.0	32.0	25.5
	27.0	13.5 ~ 19.0	42.5	0.7	51.0	56.0	68.0	24.0	4.0 x 7.0	49.0	32.0	29.5
	30.0	17.0 ~ 23.0	42.5	0.7	51.0	56.0	68.0	24.0	4.0 x 7.0	52.0	32.0	32.5
EI-54	18.0	11.0 ~ 14.0	46.5	0.7	57.0	60.0	72.0	27.0	4.0 x 7.0	44.0	36.0	20.5
	24.5	15.5 ~ 22.0	46.5	0.7	57.0	60.0	72.0	27.0	4.0 x 7.0	51.0	36.0	27.0
EI-57	24.5	16.0 ~ 26.0	50.0	0.8	60.0	62.0	75.0	28.5	4.5 x 7.0	53.0	38.0	28.0
	30.0	21.0 ~ 36.0	50.0	0.8	60.0	64.0	76.0	28.5	4.8 x 8.0	56.0	38.0	33.0
EI-60	24.0	16.5 ~ 28.0	52.0	0.8	64.0	68.0	80.0	30.0	4.7 x 7.0	55.0	40.0	27.0
	30.0	25.0 ~ 42.0	52.5	0.9	64.0	68.0	80.0	30.0	4.7 x 7.0	61.0	40.0	33.0

### MODEL

Indeterminate, according to the original design name voltage

## Power Transformers

SIZE	CORE STACK (mm)	RANGE OF OUTPUT POWER (VA)	External Dimensions (mm)									
			A	B	C	D	E	F	G	H	I	J
EI-66	28.0	26 ~ 45	57.5	0.9	69.5	69.0	80.5	33.0	4.5 x 6.5	60.0	44.0	31.0
	32.5	30 ~ 55	57.5	0.9	70.0	70.5	81.0	33.0	5.2 x 7.5	64.0	44.0	35.0
	36.0	36 ~ 65	57.5	0.9	70.0	70.5	81.0	33.0	5.2 x 7.5	67.0	44.0	39.5
	45.0	45 ~ 78	57.5	0.9	70.0	70.5	81.0	33.0	5.0 x 7.5	76.5	44.0	48.0
EI-76	40.0	60 ~ 80	66.5	1.2	81.0	80.0	95.0	38.5	6.0 x 9.0	78.0	51.0	44.0
	42.0	65 ~ 88	66.5	1.2	81.0	80.0	95.0	38.5	6.0 x 9.0	80.0	51.0	46.0
	50.5	85 ~ 115	66.5	1.2	81.0	80.0	95.0	38.5	6.0 x 9.0	88.0	51.0	54.5
	56.0	110 ~ 150	66.5	1.2	81.0	80.0	95.0	38.5	6.0 x 9.0	93.0	51.0	60.0
EI-86	42.0	85 ~ 118	74.5	1.2	91.0	91.0	108.0	43.0	6.0 x 10.0	79.0	57.5	46.0
	43.0	90 ~ 125	74.5	1.2	91.0	91.0	108.0	43.0	6.0 x 10.0	81.0	57.5	47.0
EI-96	50.0	160 ~ 220	83.0	1.2	101.0	100.0	119.0	48.0	6.0 x 12.0	90.0	64.0	54.0

### Remark:




The insulation construction of the above products is suitable for UL, CSA, JIS, VDE, BS, IEC, SAA, DEMKO, SEMKO or CCC standard.

### MODEL

Indeterminate, according to the original design name voltage

Regular input voltage range from AC100 to 120, Customer's OEM specifications are welcome.

## TOROIDAL POWER TRANSFORMER



Catalog No.	Input Voltage (V)	Open Voltage (V)	Output			OD (mm)	HT (mm)	Remark
			Voltage (AC,V)	Current (mA)	Power (W)			
<b>T70KJE1</b>	230-240	7	6	5000	30.0	88	35	Class B
<b>T70KJE2</b>	230-240	13.8	12	2920	35.0	88	35	Class B
<b>T70KJE3</b>	230-240	49	42	360	15.12	88	35	Class B
		14	12	800	9.6			
		14	12	800	9.6			
<b>T75A-25A1</b>	230-240	6.9	6	5000	30.0	93	42	Class B
<b>T75A-25A2</b>	230-240	13.8	12	2920	35.0	93	42	Class B
<b>T75A-25AQ</b>	230-240	48	42	570	23.94	93	42	Class B
		14.8	13	1000	13.0			
		14.8	13	1000	13.0			
<b>T85A-25A1</b>	230-240	8.9	8	8000	64.0	105	42	Class B
<b>T85A-25A2</b>	230-240	13.3	12	6700	80.0	105	42	Class B
<b>T85A-25Q</b>	230-240	46.6	42	620	26.0	105	42	Class B
		17.9	16	1500	24.0			
		17.9	16	1500	24.0			
<b>T85A-30A1</b>	230-240	10	9	1000	90.0	108	50	Class B
<b>T85A-30A2</b>	230-240	13.2	12	8750	105.0	108	50	Class B
<b>T85A-30R</b>	230-240	45.8	42	620	26.0	108	50	Class B
		16.5	15	1500	24.0			
		16.5	15	1500	24.0			
		16.5	15	1500	24.0			
<b>T95A-30A1</b>	230-240	9.9	9	15000	135.0	120	52	Class B
<b>T95A-30A2</b>	230-240	13.2	12	12500	150.0	120	52	Class B
<b>T95A-30R</b>	230-240	45.4	42	890	41.16	120	52	Class B
		19.5	18	2000	36.0			
		19.5	18	2000	36.0			
		19.5	18	2000	36.0			

### MODEL

Indeterminate, according to the original design name voltage

Customer's OEM specifications are welcome